


This MotoCAP safety rating applies to:

Brand:	Segura
Model:	Walt
Type:	Jacket - Textile
Date purchased:	13 May 2019
Sizes tested:	XL and 2XL
Gender:	M & F
Style:	All Purpose
Test code:	J19T15

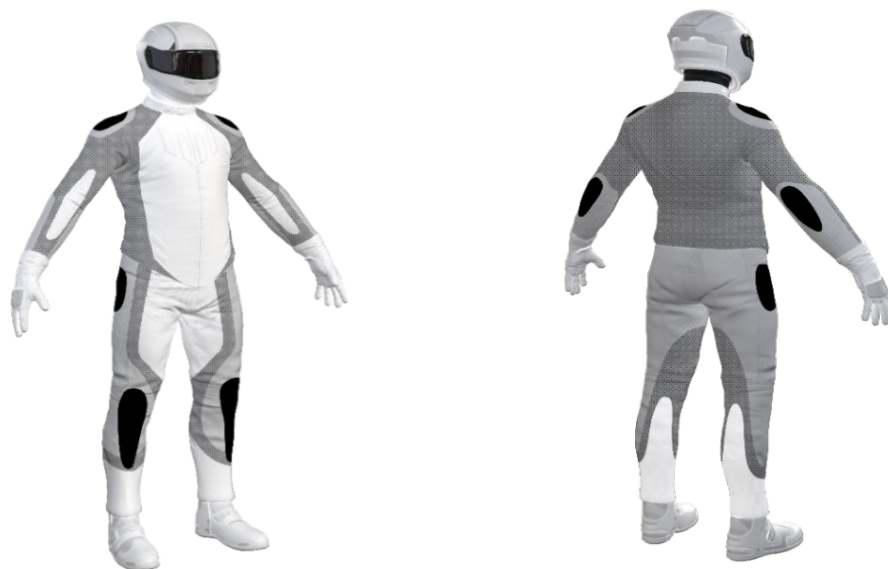
Test Results Summary:

	Rating	Score
MotoCAP Protection Rating	★★★	43.1
Abrasion	3/10	2.06
Burst	10/10	1734
Impact	7/10	51.5
MotoCAP Comfort Rating	★★	0.35
Moisture Vapour Resistance		31.0
Thermal Resistance		0.182
Water resistance	N/A	N/A

This garment is fitted with impact protectors for the elbows and shoulders. A pocket is provided at the back for an aftermarket impact protector. Permanent ventilation is provided by mesh panels in the arms, chest and back to allow airflow movement through the garment.

Jacket and Pants - Crash Impact Risk Zones

This diagram is a pictorial representation of the crash impact risk Zones.


Zone 1

High risk of abrasion
High risk of impact

Zone 2

High risk of abrasion

Zone 3

Medium risk of abrasion

Zone 4

Low risk of abrasion

Abrasion Resistance

The garment was tested for abrasion resistance in accordance with MotoCAP test protocols. The table below shows the test results for time to abrade through all layers of the materials. Calculated for each sample by Zone, type and area coverage of each material as a proportion of that Zone.

Details of materials used in garment:

Material A:	Quilted fabric shell with mesh inner liner
Material B:	Fabric shell with mesh inner liner
Material C:	Mesh shell with mesh inner liner

Zone	Coverage (%)	Abrasion time for each test (seconds)						Average (seconds)	
		1	2	3	4	5	6		
Zone 1 and 2 areas (High abrasion risk)									
Material A	95%	2.16	2.15	7.84	2.73			3.72	G
Material B	10%	0.57	0.64	0.43	0.54	0.48	0.42	0.51	P
Zone 3 area (Medium abrasion risk)									
Material B	70%	0.57	0.64	0.43	0.54	0.48	0.42	0.51	P
Material C	30%	0.83	0.85	0.70	0.67	0.65	0.65	0.73	P
Zone 4 area (Low abrasion risk)									
Material B	25%	0.57	0.64	0.43	0.54	0.48	0.42	0.51	M
Material C	75%	0.83	0.85	0.70	0.67	0.65	0.65	0.73	M

Abrasion times are capped at a maximum of 10.00s.

The diagram below is a visual indication of the likely abrasion performance of the materials in each zone calculated from the data in the table above. The colour coding is based on the worst performing material in each zone.



		Good	Acceptable	Marginal	Poor
Determining Criteria					
High abrasion risk	Zone 1/2:	> 5.6	3.0 - 5.6	1.3 - 2.9	< 1.3
Medium abrasion risk	Zone 3:	> 2.5	1.8 - 2.5	0.8 - 1.7	< 0.8
Low abrasion risk	Zone 4:	>1.5	1.0 - 1.5	0.4 - 0.9	< 0.4

Burst Strength

The garment's burst strength was tested in accordance with MotoCAP test protocols. The table below shows the burst pressure in kilopascals (kPa) for each sample tested by Zone and the average result for each zone.

Burst pressure (kPa)

Area	1	2	3	4	5	Average	
Zones 1 & 2	1951	1955	1957	1564	1951	1876	G
Zone EZ	1790	1963	1285	1778	1843	1732	G
Zones 3 & 4	1947	498	1153	1737	1943	1455	G

The diagram below illustrates the burst strength results in terms of the likely performance of the garment in an impact and is a pictorial representation of the data from the table above.



Determining Criteria

Burst strength

	Good	Acceptable	Marginal	Poor
(kPa)	> 1000	800 - 1000	500 - 799	< 500

Impact Protection

The garment was tested for impact protection and coverage in accordance with MotoCAP test protocols. The table below shows the test results for each strike on each impact protector in kilonewtons (kN) and their area of coverage as a proportion (%) of the Zone.

Impact protector type	Elbow		Shoulder	
Average force (kN)	13.6	G	13.5	G
Maximum force (kN)	18.6	A	19.0	A
Coverage of zone 1 area	110%		105%	
Coverage of zone after displacement	85%		80%	

Individual test results

Impact force (kN)	Elbow			Shoulder		
Strike location	A	B	C	A	B	C
Impact Protector 1	9.3	11.9	18.6	10.9	13.4	18.0
Impact Protector 2	11.2	14.5	18.3	12.9	13.3	19.0
Impact Protector 3	8.0	12.9	17.7	11.1	11.1	11.8

The diagram below is a visual indication of the likely performance of each impact protector calculated from the data in the table above. The colour coding is based on the worst performing score for average or maximum force for each impact zone.



Determining Criteria

Impact force (kN)	Good	Acceptable	Marginal	Poor*
	< 15	15 - 24	25 - 30	> 30

* Poor may also indicate that no impact protector, or impact protector pocket is present in the garment

Areas shaded black are not considered in the impact protection ratings.

Thermal comfort

The garment was tested for thermal comfort following the MotoCAP test protocols. The table below shows the moisture vapour resistance and the thermal resistance values obtained.

	1	2	Average
Moisture Vapour Resistance - R_{et} (kPam ² /W)	34.0	28.1	31.0

	1	2	Average
Thermal Resistance - R_{ct} (Km ² /W)	0.182	0.183	0.182

Water spray and rain resistance

This garment has not been advertised as water resistant so has not been tested for water spray and rain resistance.

Assessment Details.

Brand	Segura
Model	Walt
Type	Jacket - Textile
Date purchased	13 May 2019
Tested by	AMCAF, Deakin University
Garment test reference	J19T15
Rating first published	September 2021
Rating updated	1 October 2021