



This MotoCAP safety rating applies to:

Brand Helstons

Model Vince Armalith

Type Jacket - Textile

Date purchased 1 June 2023

Sizes tested XL and 2XL

Test garment gender Male

Style All Purpose


Style All Purpose RRP \$589.99

Test Results Summary	Rating	Score
MotoCAP Protection Rating	**	31.4
Abrasion	1/10	0.91
Burst	10/10	1246
Impact	7/10	48.0
MotoCAP Breathability Rating	***	0.432
Moisture Vapour Resistance	-	23.1
Thermal Resistance	-	0.166
Water resistance	N/A	N/A

This garment is fitted with impact protectors for the elbows, shoulders and back. There are no vents to allow airflow movement through the garment.

Jacket and Pants - Crash Impact Risk Zones

This diagram is a pictorial representation of the crash impact risk Zones.

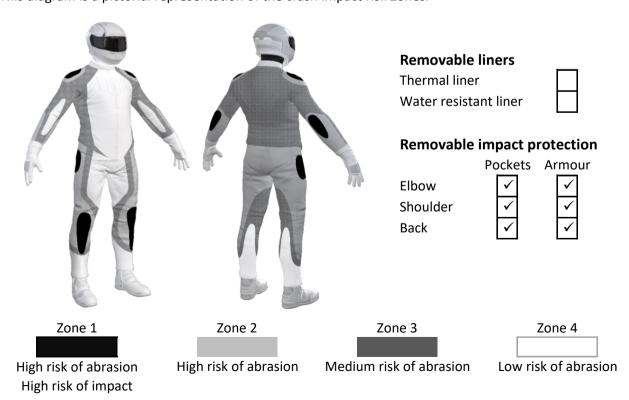



Abrasion Resistance

The jacket was tested for abrasion resistance in accordance with MotoCAP test protocols. The diagram below is a visual indication of the likely abrasion performance of the materials in each zone calculated from the data in the table below. The colour coding is based on the worst performing material in each zone.



Abrasion Resistance Performance

Abrasion rating	1/10
Abrasion score	0.91

Determining Criteria	Area	Good	Acceptable	Marginal	Poor
High abrasion risk	Zone 1 & 2	> 5.6	3.0 - 5.6	1.3 - 2.9	< 1.3
Medium abrasion risk	Zone 3	> 2.5	1.8 - 2.5	0.8 - 1.7	< 0.8
Low abrasion risk	Zone 4	>1.5	1.0 - 1.5	0.4 - 0.9	< 0.4

Individual Abrasion Resistance Results: - The table below shows the test results for time to abrade through all layers of the materials. Calculated for each sample by Zone, type and area coverage of each material as a proportion of that Zone. Abrasion times are capped at a maximum of 10.00s.

Abrasion time for each test (seconds)

one 1 & 2	Coverage (%)	Sample 1	Sample 2	Sample 3	Sample 4	Sample 5	Sample 6	Average
aterial A	100%	1.30	0.83	0.85	1.00	0.73	0.79	0.91
one 3	Coverage (%)	Sample 1	Sample 2	Sample 3	Sample 4	Sample 5	Sample 6	Average
aterial A	100%	1.30	0.83	0.85	1.00	0.73	0.79	0.91
one 4	Coverage (%)	Sample 1	Sample 2	Sample 3	Sample 4	Sample 5	Sample 6	Average
aterial A	100%	1.30	0.83	0.85	1.00	0.73	0.79	0.91
aterial A	100%	1.30	0.83	0.85	1.00	0.73	0.79	

Details of materials used in jacket

Material A Denim fabric shell



Burst Strength

The jacket was tested for burst strength in accordance with MotoCAP test protocols. The diagram below illustrates the burst strength results in terms of the likely performance of the garment in an impact and is a pictorial representation of the data from the table below.



Burst	Strength	Performance	
			-

Burst rating	10/10
Burst score	1246

Determining Criteria	Unit	Good	Acceptable	Marginal	Poor
Burst strength	(kPa)	> 1000	800 - 1000	500 - 799	< 500

Individual Burst Strength Results: - The table below shows the burst pressure in kilopascals (kPA) for each sample tested by Zone and the average result for each zone.

Burst pressure for each seam (kPA)

Area	Sample 1	Sample 2	Sample 3	Sample 4	Sample 5	Sample 6	Average	
Zones 1 & 2	1158	1634	1423	1100	1202	1294	1302	G
Zones 3 & 4	1112	1347	705	1310	1046	629	1025	G



Impact Protection

The jacket was tested for impact protection and coverage in accordance with MotoCAP test protocols. The diagram below is a visual indication of the likely performance of each impact protector calculated from the data in the table below. The colour coding is based on the worst performing score for average or maximum force for each impact zone. Areas shaded black are not considered for impact protection ratings.



Impact Protection Performance

Impact rating	7/10
Impact score	48.0

Determining Criteria	Unit	Good	Acceptable	Marginal	Poor*
Impact force	(kN)	< 15	15 - 24	25 - 30	> 30

^{*} Poor may also indicate that no impact protector, or impact protector pocket is present in the garment

Individual Impact Protector Results: - The table below shows the test results for each strike on each impact protector in kilonewtons (kN) and their area of coverage as a proportion (%) of the Zone. Individual strike results are capped at a maximum of 50kN.

Impact protector type	Elbow		Shoulder
Average force (kN)	12.3	G	17.3 A
Maximum force (kN)	17.4	A	19.2 A
Coverage of Zone 1 area	115%		100%
Coverage of Zone after displacement	60%		90%

Individual Impact Protector Results: - The table below shows the test results for each strike on individual impact protectors in kilonewtons (kN) and the position of the strike. Individual strike results are capped at a maximum of 50kN.

Force transfer for each impact strike (kN)

Impact protector type	Elbow			Shoulder	Shoulder			
Strike location	Centre	Mid	Edge	Centre	Mid	Edge		
Impact Protector 1	9.6	11.9	12.9	16.2	17.3	18.0		
Impact Protector 2	10.0	13.2	17.4	17.2	17.1	17.1		
Impact Protector 3	9.8	10.5	14.9	17.2	16.2	19.2		



Breathability

The jacket was tested for breathability following the MotoCAP test protocols. The table below shows the moisture vapour resistance and the thermal resistance values obtained.

Without removable liners		With water-resistant liner		
Breathability rating ★★★		Breathability rating		N/A
Breathability score	0.432	Breathability score N/A		N/A
Moisture Vapour Resistance - R _{et} (kPa.m²/W)		1	2	Average
Without removable line	°S	24.0	22.1	23.1
With water-resistant line	er	N/A	N/A	N/A
Thermal Resistance - R _{ct} (K.m²/W)		1	2	Average
Without removable line	°S	0.168	0.164	0.166
With water-resistant line	er	N/A	N/A	N/A

Water spray and rain resistance

This jacket has not been advertised as water-resistant so has not been tested for water spray and rain resistance.

Assessment Details.

Brand Helstons

Model Vince Armalith

Type Jacket - Textile

Date purchased 1 June 2023

Tested by AMCAF, Deakin University Report approved by MotoCAP Chief Scientist

Garment test reference J23T37
Rating first published August 2023
Rating updated 30 August 2023